


Kerto LVL S-beam joists for residential floor

08/07/2020

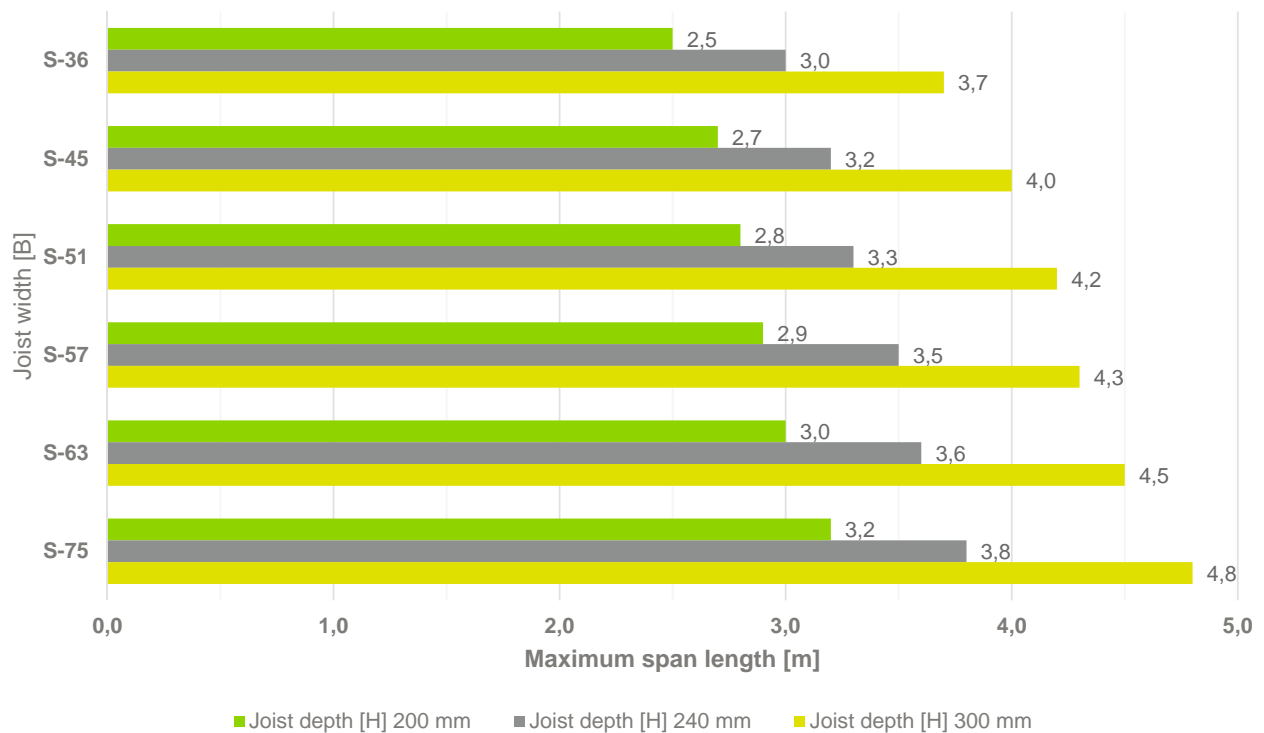


Notes:

- Calculation is done according to standard EN 1995-1-1 with National Annex of the Netherlands
- Service class 1 or 2. The consequences class is CC2, oad-duration class is mid-term
- The permanent load is < 1,3 kN/m² (excl. self-weight of the beam), live load is 1,75 kN/m²
- Partitions walls load is 0,5kNm² , included in permanent load value, and support length ≥ 45 mm.
- Spacing c/c 600mm
- Vibration parameters set for domestic residential building (f < 8Hz; a < 1,5 mm/kN)
- This document is property of Metsäliitto Cooperative (Metsä Wood) and is protected by copyright. It intends to only provide general information about Metsä Wood's products produced according to harmonised standard hEN 14374. It should not be used as a definitive source of information or as advice. To the maximum extent permitted by law, Metsäliitto Cooperative is not responsible for liability, loss, damage, or injury incurred by relying on the information either contained or omitted from this document. Metsä Wood and Kerto are registered trademarks of Metsäliitto Cooperative (Metsä Wood).
- All final structural design should always be done by qualified personnel.

Kerto LVL S-beam for residential floors

Headers, lintels, primary beams, ridge beams

08/07/2020

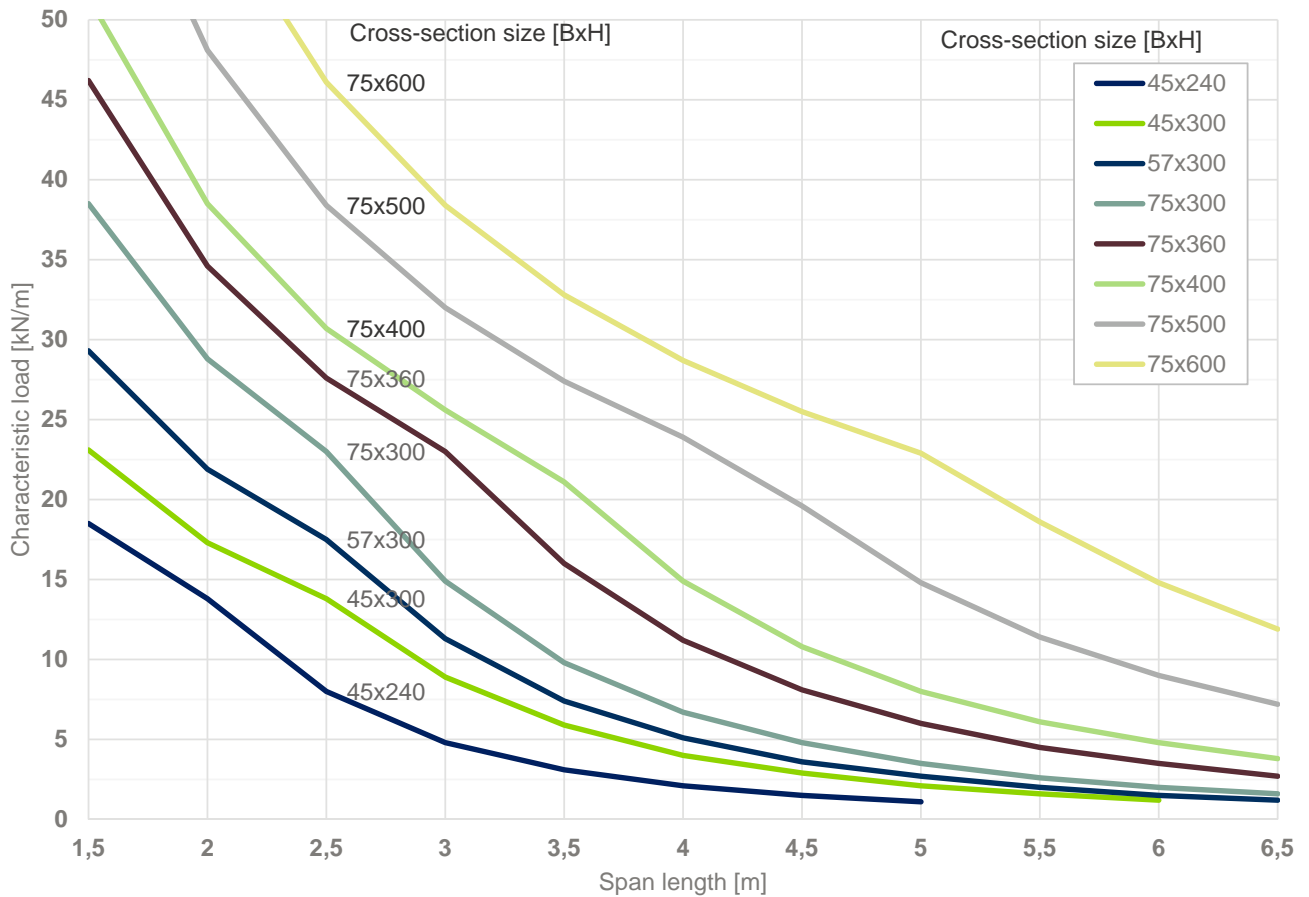


Notes:

- Calculation is done according to standard EN 1995-1-1 with National Annex of Netherlands
- Service class 1 or 2. The consequences class is CC2, load duration class is mid-term
- The permanent load shall be $\leq 35\%$ of the total characteristic load (final deflection $< 1/250$)
- The support length should be evaluated separately.
- Beam has a lateral torsional buckling supports at top surface with spacing not more than 600 mm.
- This document is property of Metsäliitto Cooperative (Metsä Wood) and is protected by copyright. It intends to only provide general information about Metsä Wood's products produced according to harmonised standard hEN 14374. It should not be used as a definitive source of information or as advice. To the maximum extent permitted by law, Metsäliitto Cooperative is not responsible for liability, loss, damage, or injury incurred by relying on the information either contained or omitted from this document. Metsä Wood and Kerto are registered trademarks of Metsäliitto Cooperative (Metsä Wood).
- All final structural design should always be done by qualified personnel.

Kerto LVL S-beam in roofs

08/07/2020

Headers, lintels, ridge beams, primary beam and primary purlins

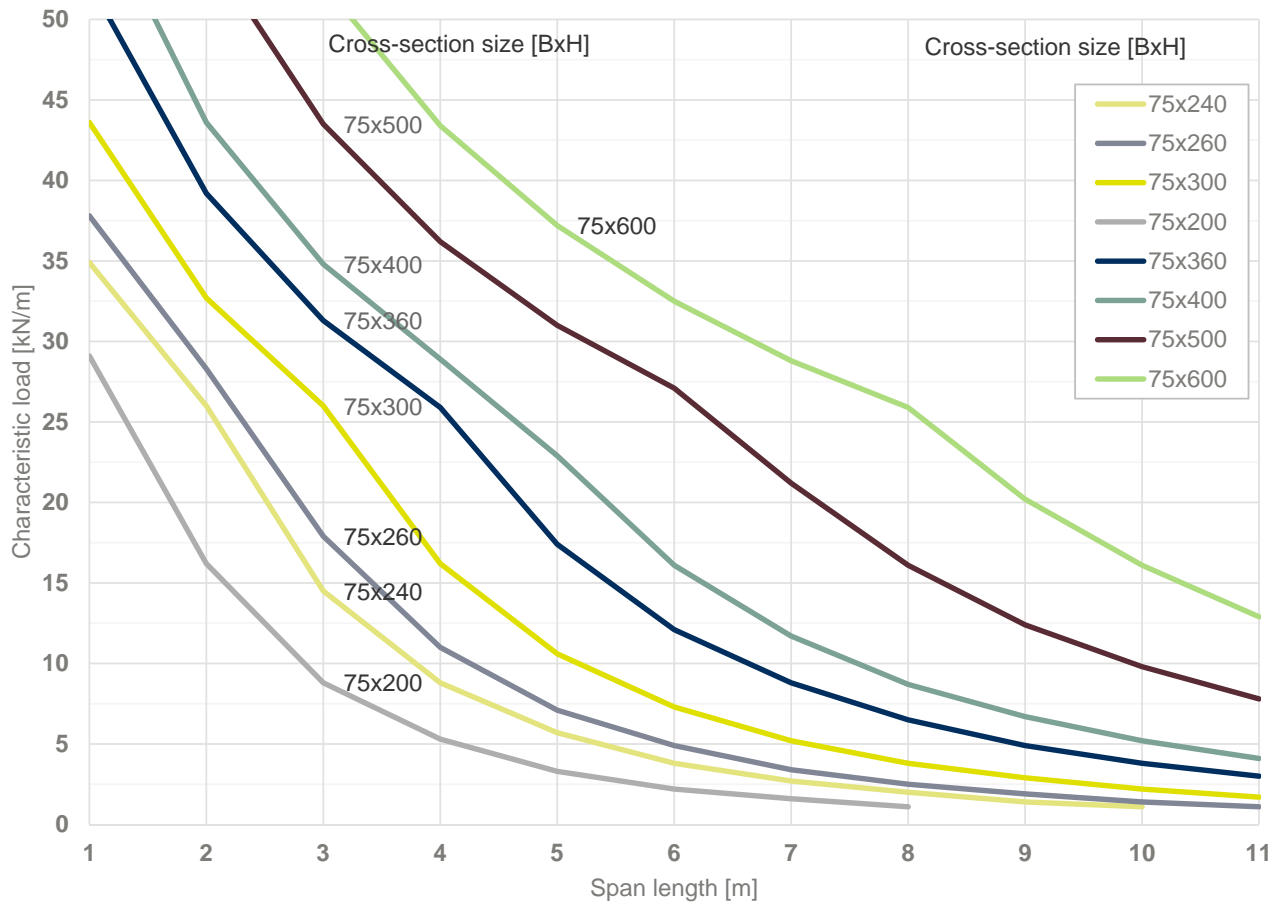


Notes:

- Calculation is done according to standard EN 1995-1-1 with National Annex of Netherlands.
- Service class 1 or 2. The consequences class is CC2, load duration classe is short-term
- The permanent load shall be $\leq 40\%$ of the total characteristic load (final deflection $< 1/250$)
- The support length should be evaluated separately.
- Beam has a lateral torsional buckling supports at top surface with spacing not more than 600 mm.
- This document is property of Metsäliitto Cooperative (Metsä Wood) and is protected by copyright. It intends to only provide general information about Metsä Wood's products produced according to harmonised standard hEN 14374. It should not be used as a definitive source of information or as advice. To the maximum extent permitted by law, Metsäliitto Cooperative is not responsible for liability, loss, damage, or injury incurred by relying on the information either contained or omitted from this document. Metsä Wood and Kerto are registered trademarks of Metsäliitto Cooperative (Metsä Wood).
- All final structural design should always be done by qualified personnel.

Kerto-LVL T-stud for non load-bearing partition wall

08/07/2020

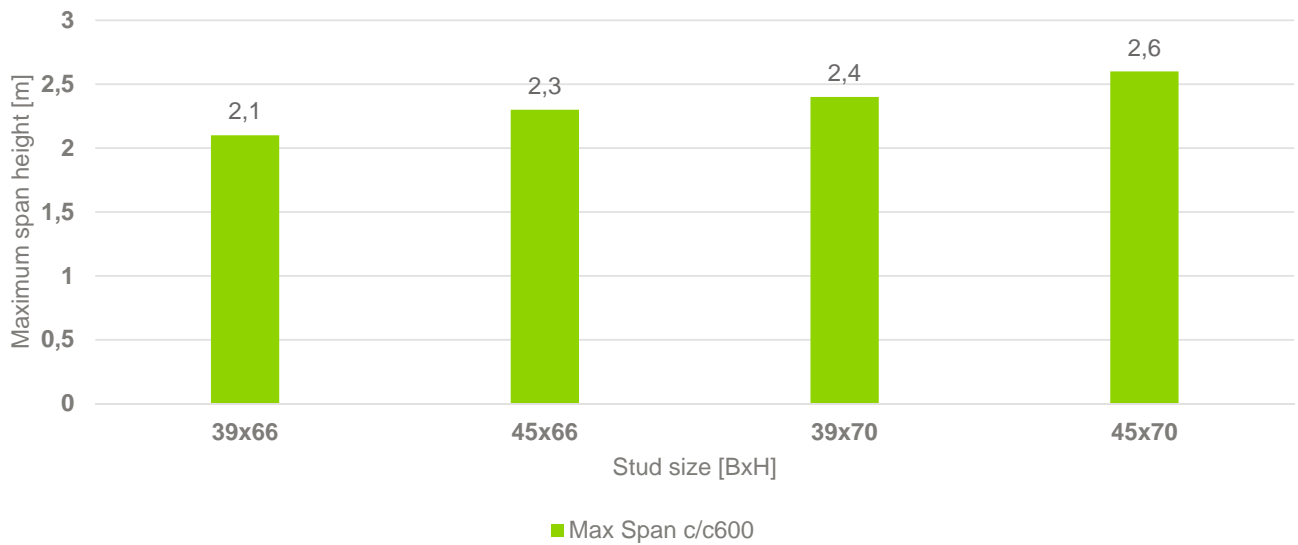

Notes:

- Calculation is done according to standard EN 1995-1-1 with National Annex of Netherlands
- Service class 1 or 2. The consequences class is CC2.
- This document is property of Metsäliitto Cooperative (Metsä Wood) and is protected by copyright. It intends to only provide general information about Metsä Wood's products produced according to harmonised standard hEN 14374. It should not be used as a definitive source of information or as advice. To the maximum extent permitted by law, Metsäliitto Cooperative is not responsible for liability, loss, damage, or injury incurred by relying on the information either contained or omitted from this document. Metsä Wood and Kerto are registered trademarks of Metsäliitto Cooperative (Metsä Wood).
- All final structural design should always be done by qualified personnel.