


# Birch Ply

## Flex Smooth

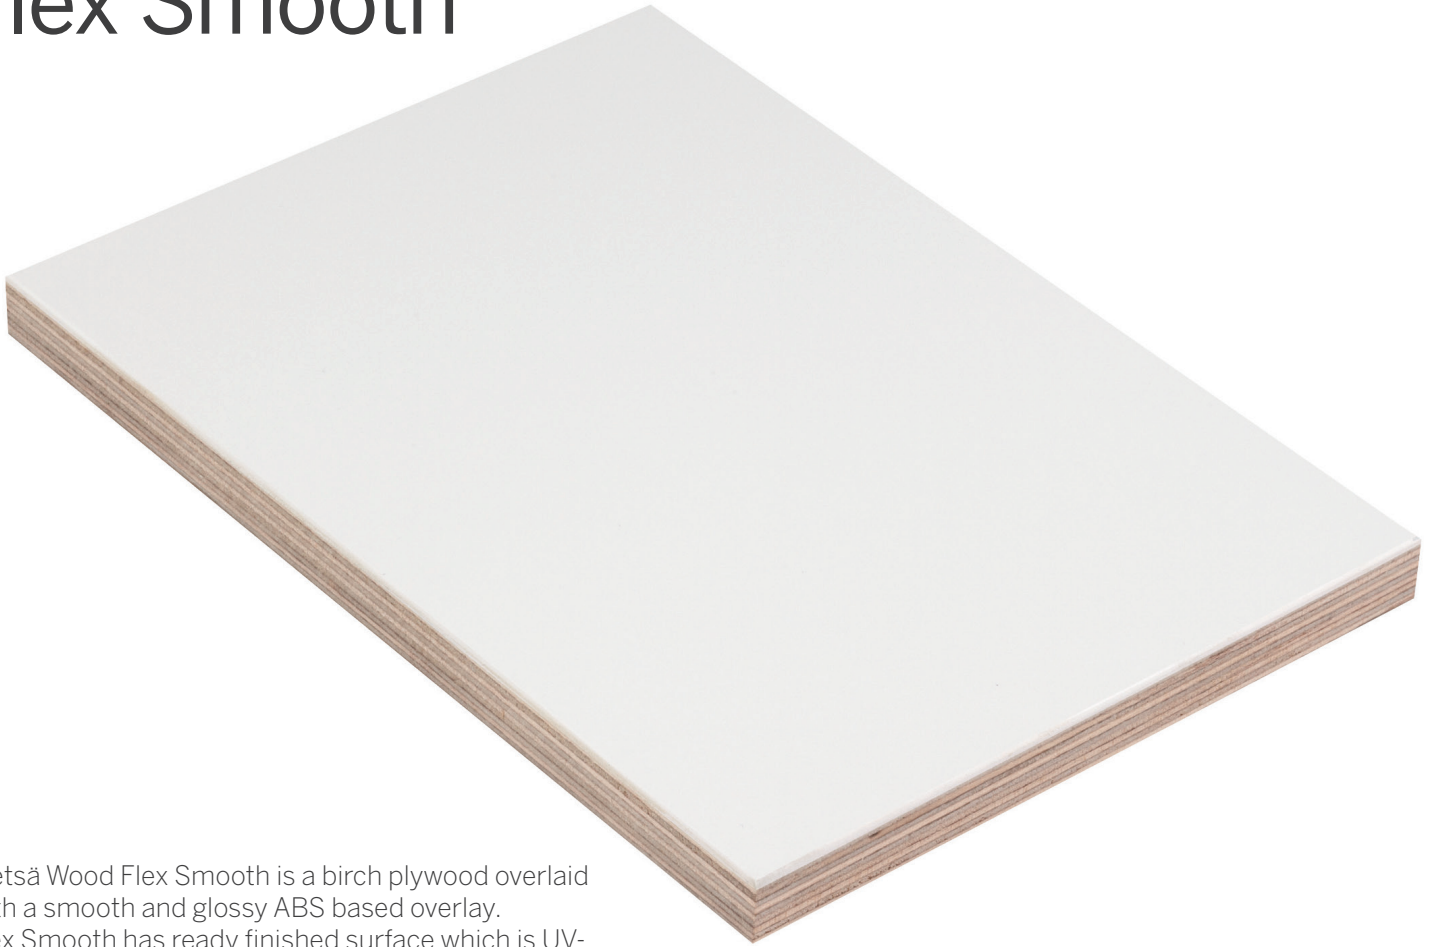

Metsä Wood Flex Smooth is a birch plywood overlaid with a smooth and glossy ABS based overlay. Flex Smooth has ready finished surface which is UV-resistant and therefore suitable for interior and exterior applications. The combination of superior surface with high technical properties makes Flex Smooth an excellent panel for various applications.

### APPLICATIONS

Metsä Wood Flex Smooth provides a larger size ready finished surface solution for the transport industry such as side walls for horse- and box trailers, light and medium size truck side walls, doors and bulk heads.

### MAJOR ADVANTAGES

- High quality smooth and glossy surface
- Ideal surface for stickers and decals
- Excellent UV and weather resistance
- Easy to fix and cut
- Easy to clean
- Excellent strength-to-weight ratio
- Dimensionally stable
- Environmentally friendly

### BASE PLYWOOD

The base plywood of Metsä Wood Flex Smooth is Metsä Wood Birch. Birch plywood is made of cross-bonded 1.4 mm thick birch veneers bonded with weather- and boil-resistant phenol formaldehyde adhesive.

### OVERLAY

The panel is overlaid with smooth and glossy ABS based overlay. The overlay has UV-additives to make it resistant against the sunlight.

The overlay is bonded to plywood with water resistant glue. Metsä Wood Flex Smooth is available in white colour. Flex Smooth surface is covered with blue protection foil in order to avoid damages during transportation and handling.

# Birch Ply

## Flex Smooth

### SURFACE PROPERTIES

The surface of the overlay is smooth and glossy. Overlay is elastic and does not crack easily. It is also moisture and UV resistant. The overlay is safe to use and dispose. It is free of chlorine, halogens, plasticizer, formaldehyde and heavy metals.

The surface is easy to clean with water and normal detergents. Strong acids, alkalis and e.g. acetone may cause visual changes on the surface.

Metsä Wood Flex Smooth plywood products have very high surface quality and the surface is susceptible to scratches due to its softer appearance, extra caution has to be practised in handling and storing the panels to prevent damage. Extreme moisture penetration may cause visible changes on the appearance of the product.

#### Technical properties of surface

- Colour stability 2 according to EN ISO 3668
- Colour change  $\Delta E < 1,5$  according to ISO 4892-2 (600 h)

### EDGE SEALING

Panel edges are sealed against moisture absorption with edge sealing paint. The colour of the edge sealing is transparent. Even though edge sealing slows down the absorption of moisture into the panel, it does not eliminate it completely.

### PANEL SIZES

Metsä Wood Flex Smooth is available in sizes:

- 1500 / 1525 mm x 2500 / 3000 / 3050 / 3660 mm

The first measurement indicates the orientation of the surface veneer grain.

Other sizes are available on request. Larger size scarf-jointed XL panels are also available by special order.

### SIZE TOLERANCES

Measured in accordance with standard EN 324, the plywood size and squareness tolerances meet EN 315 requirements.

#### PANEL TOLERANCES

LENGTH / WIDTH	TOLERANCE
< 1000 mm	±1 mm
1000-2000 mm	±2 mm
> 2000 mm	±3 mm
Squareness	±0.1 % or ±1 mm/m
Edge straightness	±0.1 % or ±1 mm/m

### THICKNESSES, STRUCTURES AND THICKNESS TOLERANCES

#### THICKNESSES, STRUCTURES AND THICKNESS TOLERANCES OF THE PANELS\*

NOMINAL THICKNESS	NUMBER OF PLYS	THICKNESS TOLERANCE		WEIGHT
(mm)	(pcs)	min. (mm)	max. (mm)	kg/m <sup>2</sup>
11	7	10.3	11.6	8.2
14	9	13.0	14.6	9.5
17	11	15.8	17.4	12.2

\* Moisture content of the product affects its dimensions

\* Average density of Metsä Wood birch plywood is 680 kg/m<sup>3</sup> (at relative humidity of RH 65 %)

\* Special structures and thicknesses are available on request

\* Customised tolerances are possible but must be agreed separately

### METSÄ WOOD

P.O. Box 50, 02020 Metsä, Finland

Tel. +358 1046 05

[www.metsawood.com/plywood](http://www.metsawood.com/plywood)

### BONDING CLASSES

Metsä Wood plywood panels are bonded with a weather- and boil-resistant phenol formaldehyde adhesive. The gluing meets the requirements of the standard EN 314-2 / Class 3 (exterior).

The overlay is bonded to plywood with weather resistant adhesive (EN 204 class D4)

### FORMALDEHYDE EMISSIONS

Determined according to EN 717-1, the formaldehyde emitted by Metsä Wood Birch falls far below the Class E1 requirement of  $\leq 0,100$  ppm and fulfils also the most stringent requirements in the world ( $\leq 0,030$  ppm). The formaldehyde emission of Metsä Wood Birch is approximately 0,013 ppm. Thermoplastic overlay does not contain any formaldehyde.

### PANEL STRENGTH PROPERTIES

Metsä Wood Flex Smooth strength and elasticity properties are identical with the Metsä Wood Birch standard plywood properties. The properties are specified according to standards EN 789 and EN 1058 and can be found in the Metsä Wood Birch Declaration of Performance (DoP). DoP documents can be downloaded from [www.metsawood.com/dop](http://www.metsawood.com/dop).

### MACHINING

Metsä Wood Flex Smooth plywood panels can be machined according to customer specification on request.

### PACKING

Metsä Wood Flex Smooth panels are packed in moisture-resistant plastic wrapping.

#### PACKING QUANTITIES

PANEL SIZE	mm	NUMBER OF PANELS PER PALLET BY THICKNESS		
		11	14	17
1500/1525 x 2400-3660		50	40	35
1500/1525 x 1500-2135		75	60	50
3050-2400 x 1800/1900/2150		Packet sizes agreed case by case		
6000 x 1800/1900/2150		Packet sizes agreed case by case		

### FURTHER INFORMATION

- Metsä Wood Birch Declaration of Performance ([www.metsawood.com/dop](http://www.metsawood.com/dop))
- Metsä Wood Flex Product Data Sheet

This leaflet is provided for information purposes only and no liability or responsibility of any kind is accepted by Metsä Wood or their representatives, although Metsä Wood has used reasonable efforts to verify the accuracy of any advice, recommendation or information. Metsä Wood reserves the right to alteration of its products, product information and product range without any notice.

